

Vickers®


SystemStak™



SystemStak™ Valves

ISO 4401 -05 size, 315 bar (4500 psi) and 120 l/min (32 USgpm) maximum ratings

Pressure relief and reducing, sequence, counterbalance, and flow control functions

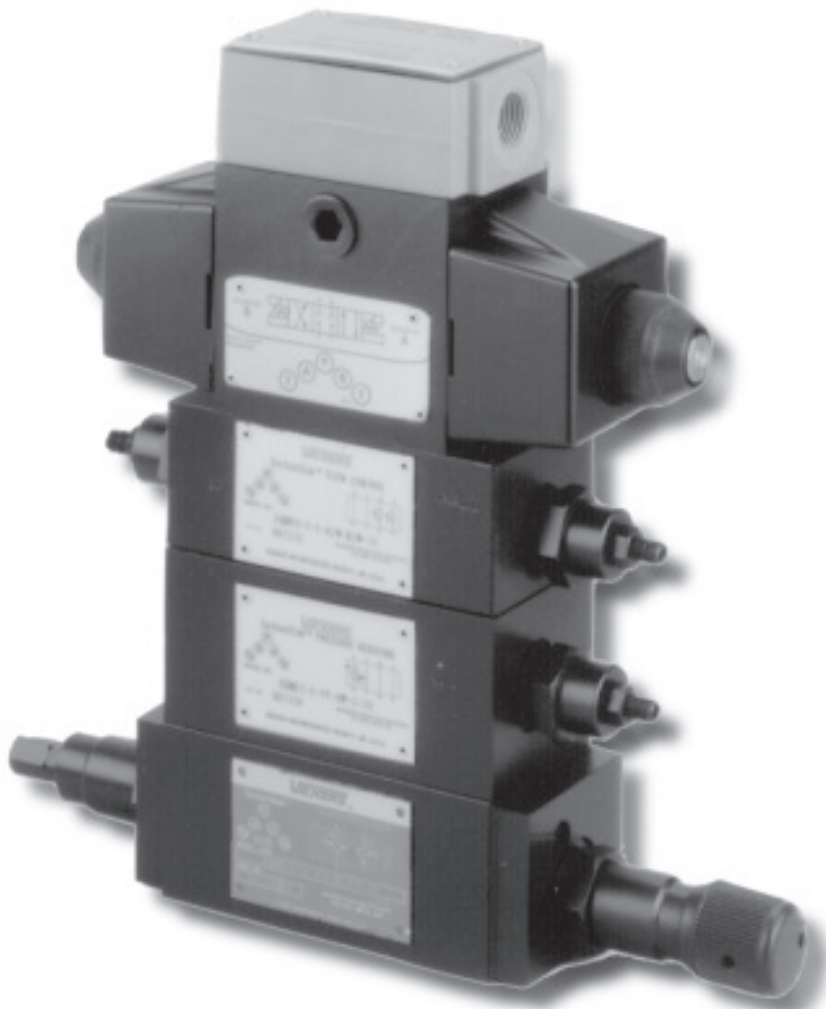

VICKERS

Revised 11/97

Introduction

General Description

Vickers SystemStak™ valves make compact hydraulic systems in which modular valves are “sandwich” mounted between a directional valve and a standard mounting surface. Compact design improves system response by elimination of external fluid conductors, thereby resulting in elimination of resonant sounds which are noisy and lead to leakage. The design of these valves is well proven and offers opportunities for achieving small control assemblies, especially when the valves are used with multi-station manifolds.

Three mounting surfaces are available for interfacing with directional valves and are coded “5”, “5N”, or “5P” in the model numbers of Vickers SystemStak valves. The “5” interface accepts Vickers DG4S4 directional valves and other directional valves with a standard ISO 4401-05, NFPA-D05, ANSI/B93.7M size D05 or CETOP-5 port pattern. “5N” and “5P” NFPA-D05 interfaces accept

the Vickers directional valves listed on page 38.

Each valve “stak” can be configured to provide the specific combination of functions required to meet the system’s needs.

SystemStak valves are divided into two groups:

1. Valves acting in the pressure and/or tank lines (“P” and/or “T”)

DGMC	Relief valve
DGMDC	Direct check
DGMFN	Flow control
DGMR1	Sequence valve
DGMX2	Pressure reducing

The general rule for this group is that the DGMC relief valve be placed nearest the subplate or manifold.

The DGMDC direct check valve should be placed nearest the directional control valve.

The DGMR1 sequence valve should be the farthest valve from the directional valve. The DGMR1 must be mounted directly to a subplate or manifold with a drain port, to externally drain the DGMR1 at the mounting face.

2. Valves acting in the service lines (“A” and/or “B”)

DGMC	Relief valve
DGMC2	Dual relief valve
DGMDC	Direct check
DGMPC	Pilot operated check
DGMFN	Flow control
DGMR	Counterbalance

The general rule for this group is that the DGMC system relief valve be the farthest valve from the directional valve.

When using a DGMPC with a DGMFN (meter-out), the DGMPC should be nearest the directional valve.

Features and Benefits

● Reduced space requirements

Stackable SystemStak valves, used with ISO 4401-05, CETOP 5 (NFPA-D05) directional controls, provide compact cost-effective control of actuator direction, speed and force.

● Reduced installed cost

SystemStak valves eliminate all intervalve piping and connections, thereby reducing the number of potential leakage points. Installed cost is less than when using conventional subplate- or line-mounted valves.

● Versatile & easy to install

SystemStak valves have all the internal passages necessary to serve the directional valve mounted above them. Any directional valve with a standard ISO 4401-05, NFPA-D05, ANSI/B93.7M size D05 or CETOP-5 port pattern can be used with ISO 4401-05 SystemStak valves.

Vickers bolt-extender kits simplify valve installation by permitting each valve body to be separately and quickly installed, and correctly torqued down. The kits also allow the directional valve to be removed for service or replacement without disturbing the stack.

● Rugged & reliable

Internal working parts are produced from hardened steel, and reside in a continuous-cast ductile (spheroidal graphite) iron body. Excellent reliability is ensured, even in high pressure applications. Working parts are serviceable without removing valves from the stack.

Easy to Understand, Easy to Design

SystemStak circuitry is best shown using slightly different symbols than those for traditional valve configurations. Each SystemStak symbol has the same basic form and size as shown in Figure 1.

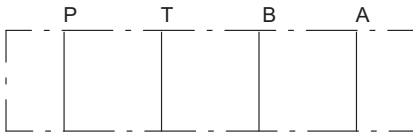


Figure 1.

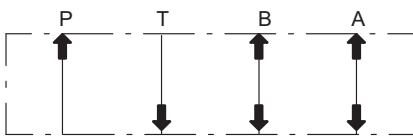


Figure 2.

For ease of understanding, remember the directions of flow for each line, and that all four flow paths pass through each valve (see Figure 2). For clarity, directional valves are drawn vertically in SystemStak circuit diagrams (see Figure 3.)




Figure 3.

Each station (valve stack) is a combination of functions. When designing and assembling SystemStak valves, care must be taken to ensure that they interact as required by stacking the functions in the correct sequence (see Figure 4). Direct check valves should be placed closest to the directional valve. Relief valves should normally be positioned next to the mounting surface (i.e. at the bottom of the stack). When both a flow control and a pilot operated check valve is required, it is recommended that the flow control valve be between the check valve and the actuator to prevent check valve chatter.

A combination of directional valve, SystemStak valve(s) and subplate/manifold block (Figure 5 single station subplate and Figure 6 multi station manifold) completes the assembly.

Figure 7 represents a complete SystemStak system, showing typical use of functions available from this range. The circuit diagram also shows the use of a tapping plate for accessing line pressure readings, and a blanking plate to close off an unused station of a multi-station manifold.

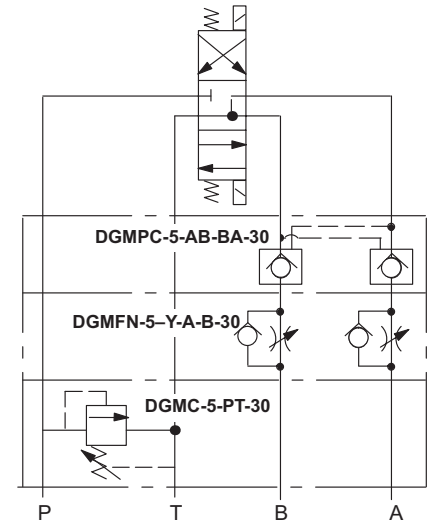


Figure 4.




Figure 5.

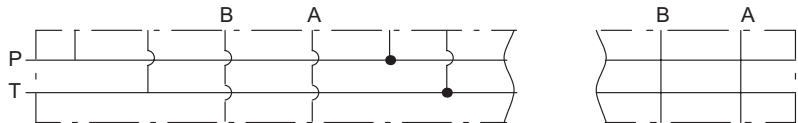


Figure 6.

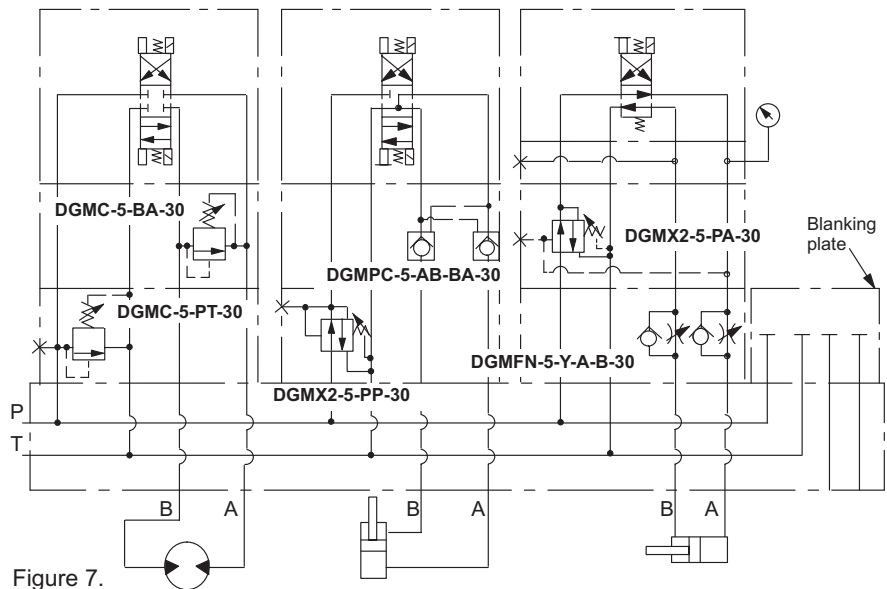


Figure 7.

DGMC/DGMC2 Pilot Operated Relief Valves

General Description

These two-stage valves limit system pressure by directing flow to tank or the opposite cylinder port (A-B/B-A crossport types) when system pressure reaches the valve setting.


Pressure control may be obtained in "A", "B", "A" and "B", or "P" port, and pilot flow may be internally or externally drained, depending on model type.

Any pressure in the line to which these valves are drained is additive to the valve pressure setting.

The valve pressure setting is adjustable by means of either an adjusting screw and locknut, a hand-knob adjuster, or a micrometer knob with keylock.

External remote control/vent connections are available on all models except crossport relief. If required on crossport models, contact your Vickers representative.

Model Code

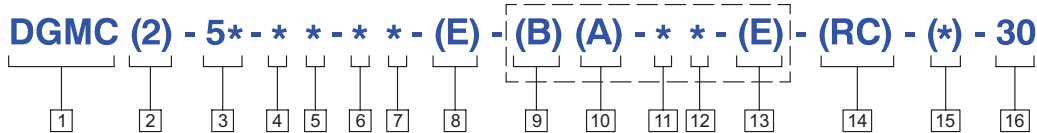

1 Valve function

Manifold or subplate mounted pressure relief valve.

2 Valve type

2 - Dual relief cavities
Blank - Single relief

3 Interface

5 - ISO 4401-AC-05-4-A, CETOP RP35H ANSI/NFPA D05
5N - NFPA D05 (Alt. A)
5P - NFPA D05 (Alt. B)

4 Port operated upon

A - "A" cylinder port (single, dual or crossport types)
B - "B" cylinder port (single type only)
P - Pressure port (single type only)

5 Port drained into

A - "A" cylinder port
B - "B" cylinder port (crossport type only)
T - Tank port (single or dual types)

6 Pressure range

A - 4 to 50 bar (60 to 725 psi)
B - 4 to 100 bar (60 to 1450 psi)
F - 4 to 200 bar (60 to 2900 psi)
G - 4 to 315 bar (60 to 4500 psi)

7 Adjustment device

H - Knob adjuster
K - Micrometer knob with keylock
W - Screw with locknut

8 External drain

E - External drain
Omit for internal drain models.

9 P port acted upon

B - "B" cylinder port (dual or crossport type)
Omit for single type.

10 Port drained into

A - "A" cylinder port (crossport type only)
T - Tank port (dual type only)

11 Pressure range

Omit for single type.
A - 4 to 50 bar (60 to 725 psi)
B - 4 to 100 bar (60 to 1450 psi)
F - 4 to 200 bar (60 to 2900 psi)
G - 4 to 315 bar (60 to 4500 psi)

12 Adjustment device

Omit for single relief models.
H - Knob adjuster
K - Micrometer knob with keylock
W - Screw with locknut

13 External drain

E - External drain same as position 8
Omit for single relief models.

14 Remote control port

RC - Remote control port
Not available on crossport models.

15 Gage port & thread type

Gage port for P-T models only; optional remote control (RC) and external drain (E) ports as applicable. Omit for crossport models
B - G 1/8" (1/8" BSPF)
S - SAE-4 O-ring boss port (0.4375-20 UNF-2B thread)

16 Design number - 30 series

Subject to change. Installation dimensions unaltered for design numbers 30 to 39 inclusive.



Installation Dimensions

DGMC-5-PT Single Relief

mm (inches)



See page 37 for optional adjustment devices.
See page 38 for interface dimensions.

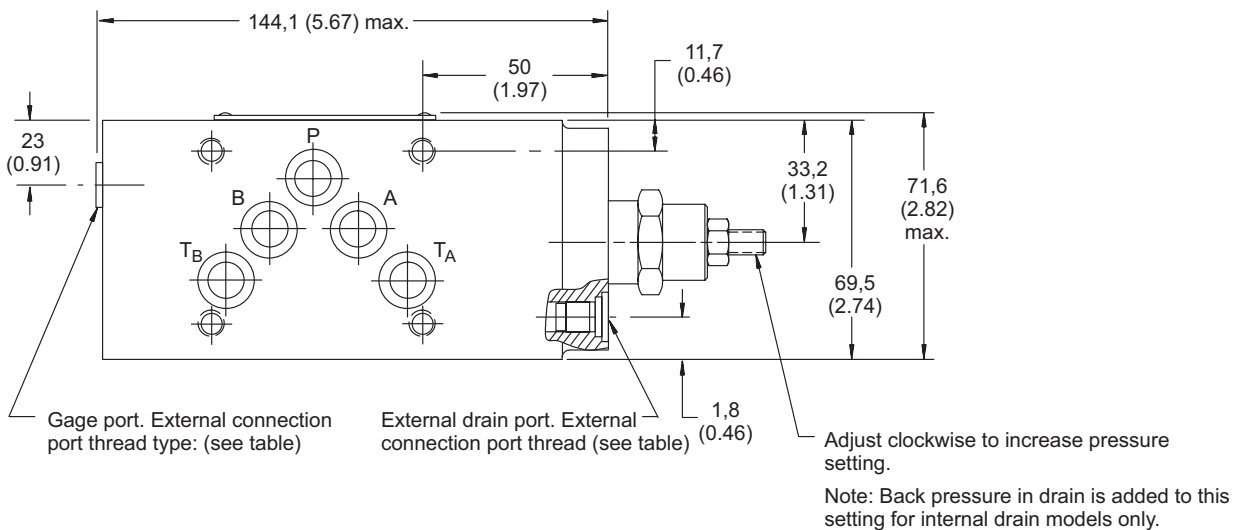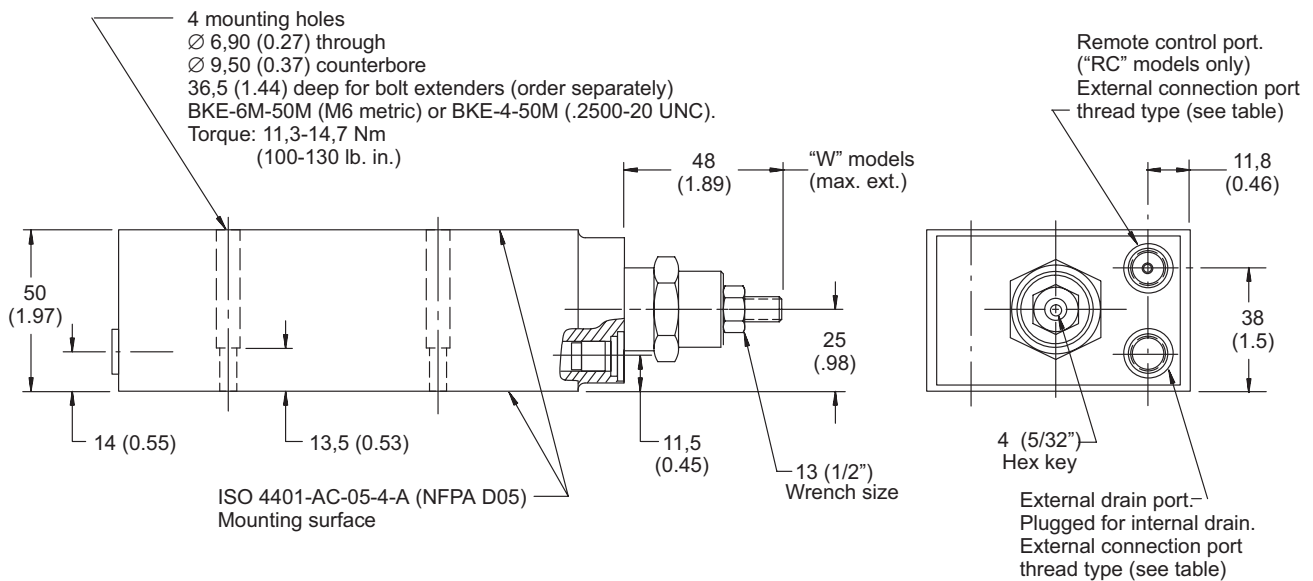


External connection port threads

"S" models - SAE-4 O-ring boss port
 (0.4375-20 UNF-2B thread).

"B" models - G 1/8 (1/8 BSPF)

DGMC-5-BT Single Relief

mm (inches)

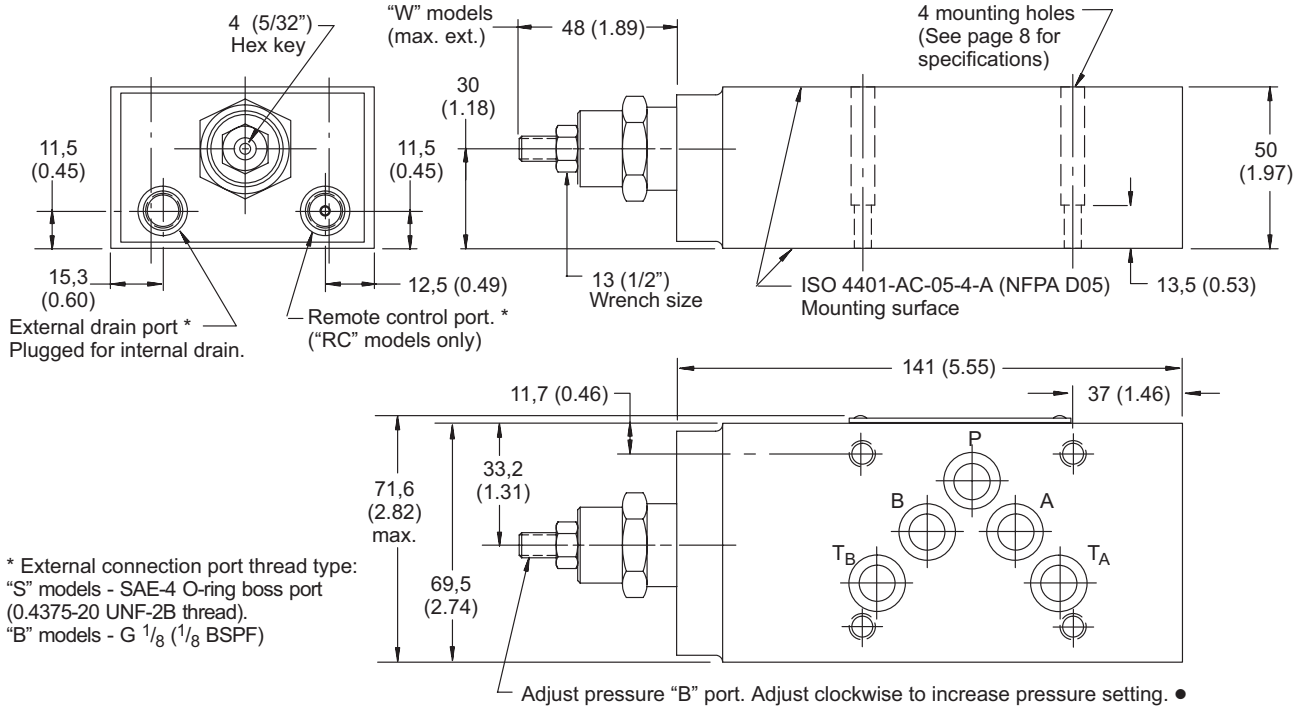


* External connection port thread type:
 "S" models - SAE-4 O-ring boss port
 (0.4375-20 UNF-2B thread).
 "B" models - G 1/8 (1/8 BSPF)

See page 37 for optional adjustment devices.

See page 38 for interface dimensions.

● Back pressure in drain is added to this setting for internal drain models only.

DGMC-5-AT Single Relief


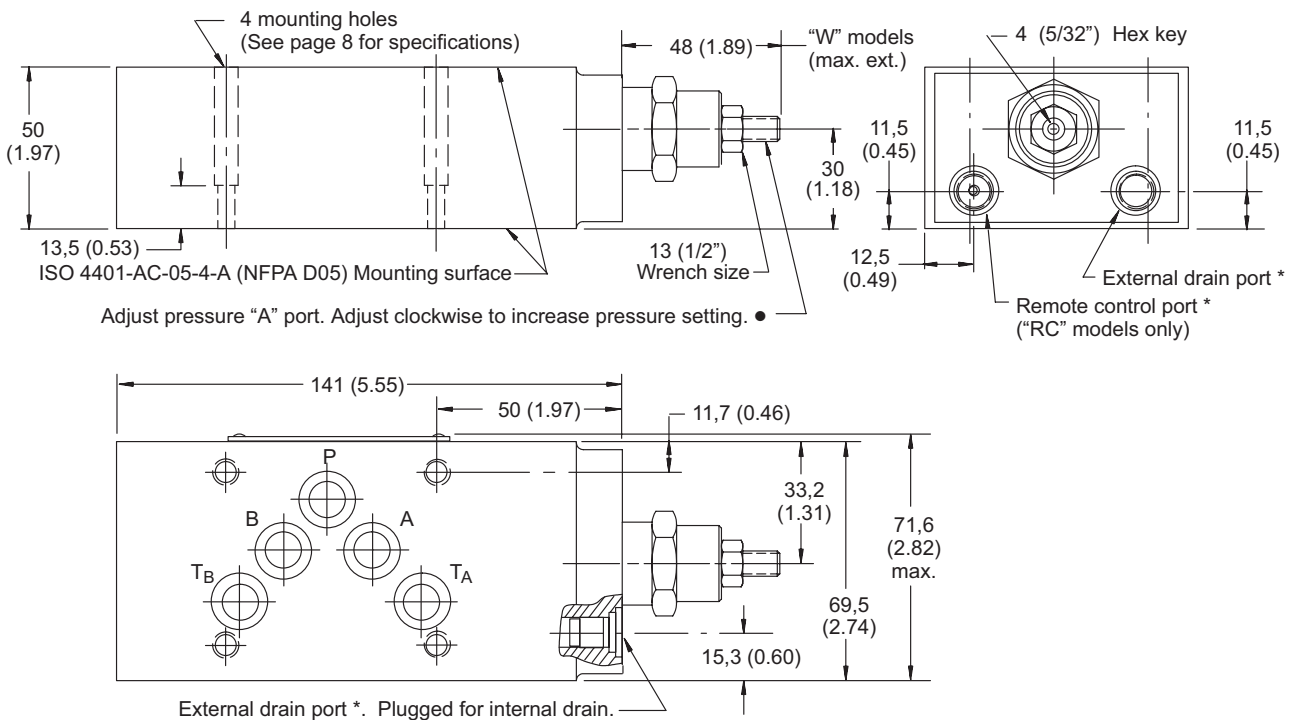


DGMC2-5-AT-**-BT-**-30

Dual Relief

mm (inches)

See page 37 for optional adjustment devices.
See page 38 for interface dimensions.

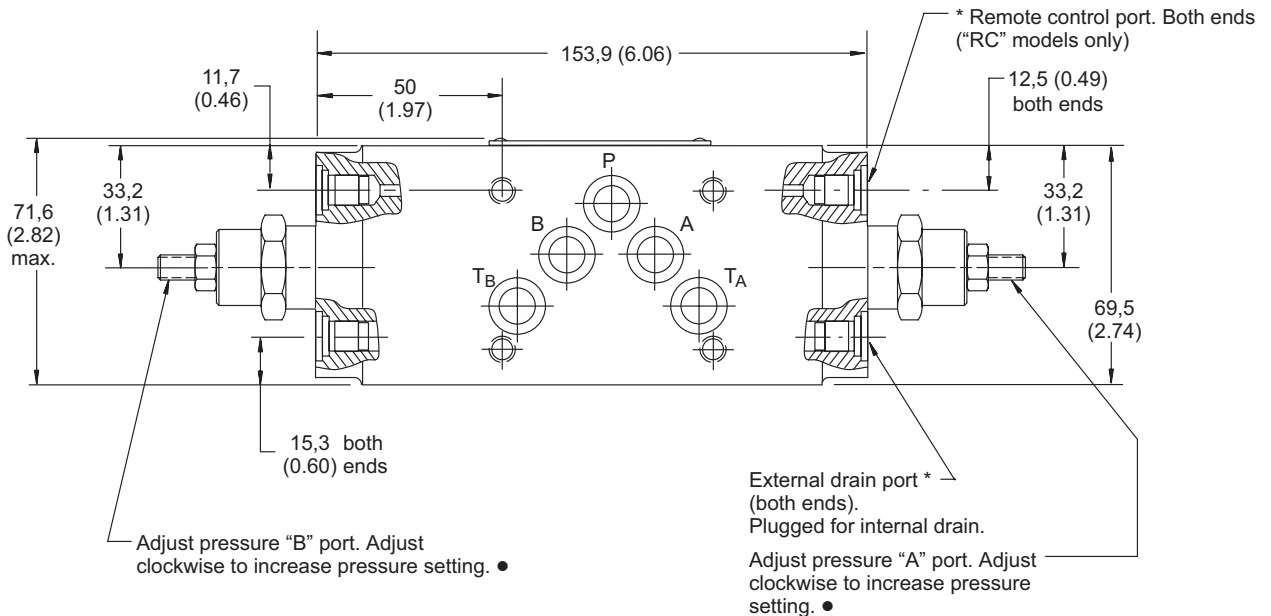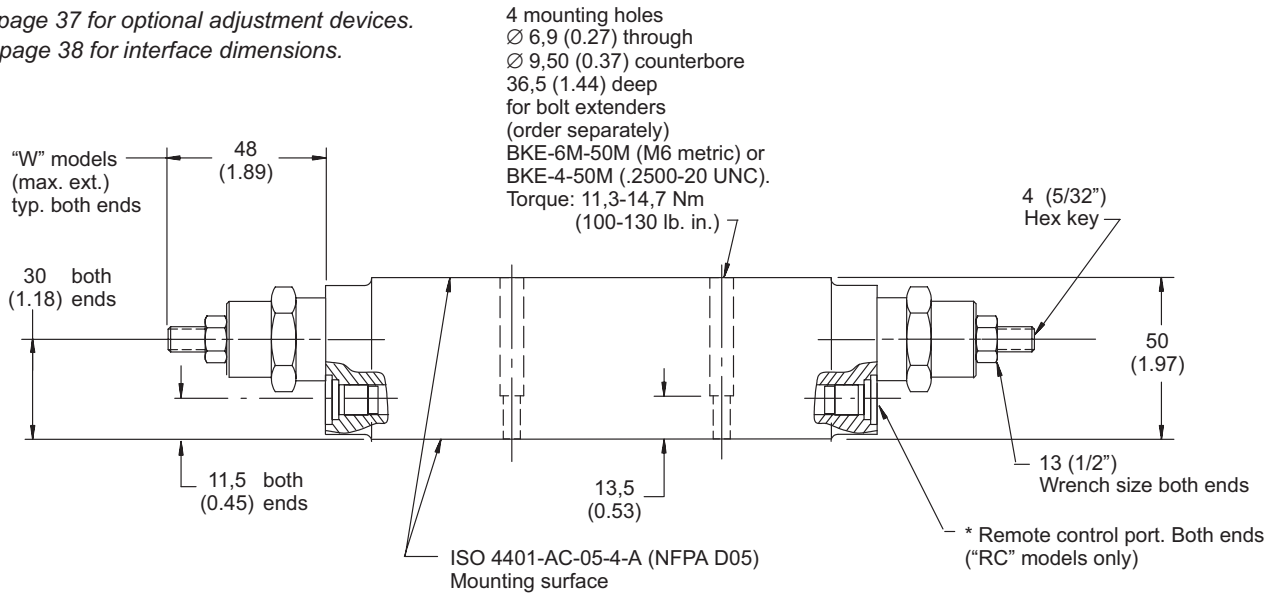

* External connection port thread type:
 "S" models - SAE-4 O-ring boss port
 (0.4375-20 UNF-2B thread).
 "B" models - G $1/8$ ($1/8$ BSPF)
 [15] in model code

● Back pressure in drain is added to this
 setting for internal drain models only.



DGMC2-5-AB-**-BA-**-30

Dual Crossport Relief

mm (inches)

See page 37 for optional adjustment devices.

See page 38 for interface dimensions.

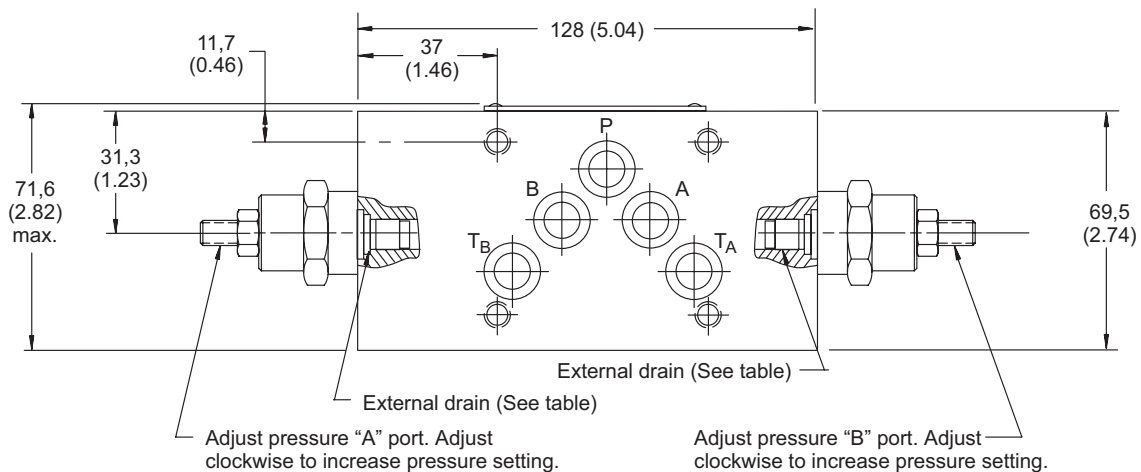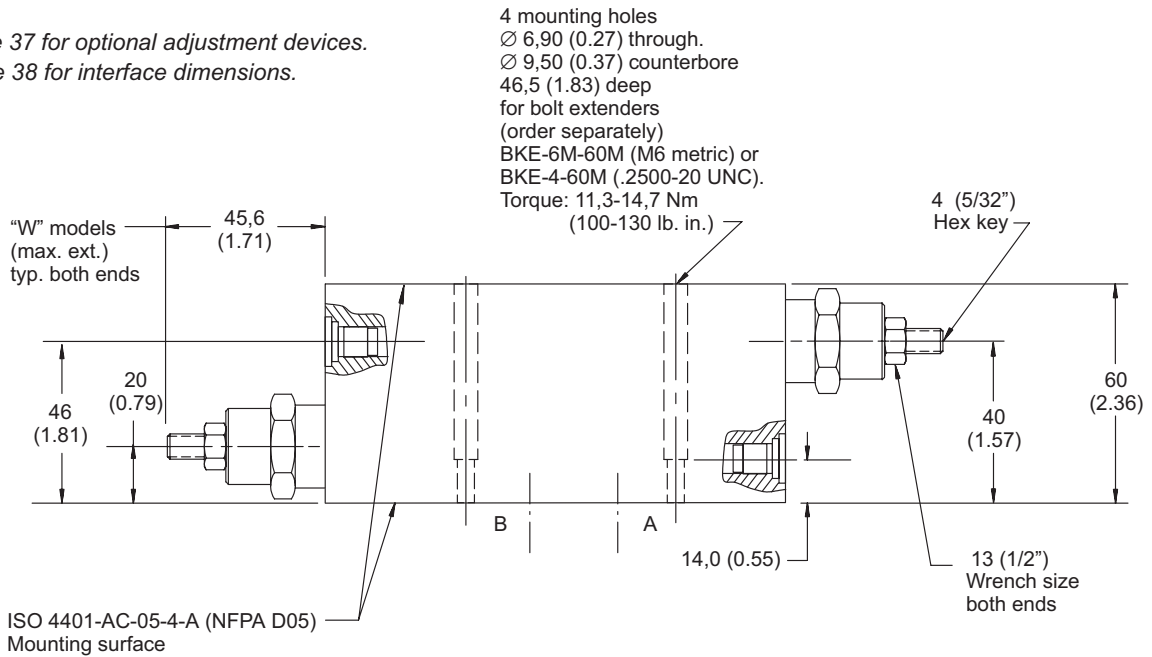

External drain port threads

"S" models - SAE-4 O-ring boss port
 (0.4375-20 UNF-2B thread).


"B" models - G 1/8 (1/8 BSPF)

DGMC-5-AB--(-E)-*-30**
Single Crossport Relief

mm (inches)

See page 37 for optional adjustment devices.
 See page 38 for interface dimensions.


4 mounting holes
 Ø 6,90 (0.27) through.
 Ø 9,50 (0.37) counterbore
 46,5 (1.83) deep
 for bolt extenders
 (order separately)
 BKE-6M-60M (M6 metric) or
 BKE-4-60M (.2500-20 UNC).
 Torque: 11,3-14,7 Nm
 (100-130 lb. in.)

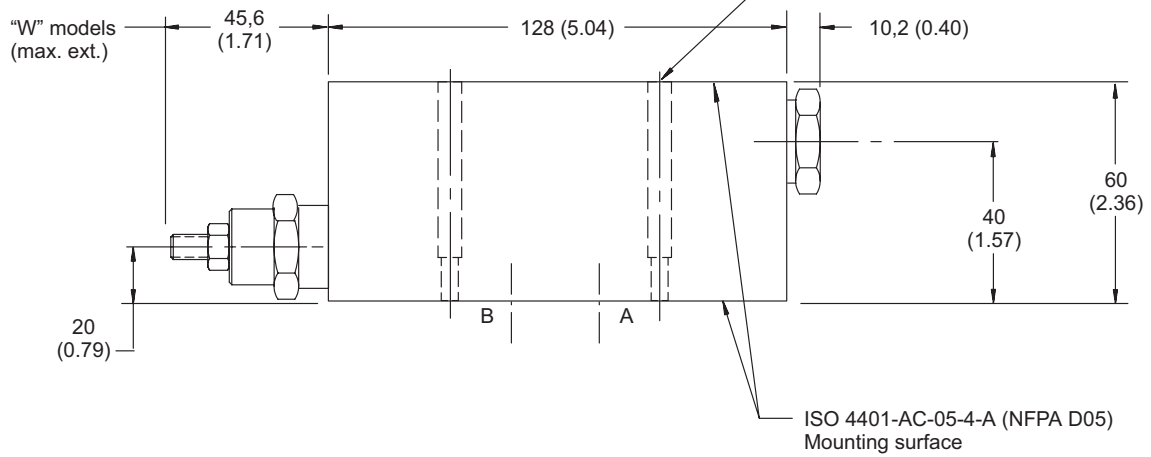

DGMC-5-BA--(-E)-*-30**
Single Crossport Relief

mm (inches)

4 mounting holes
 (See above for specifications)

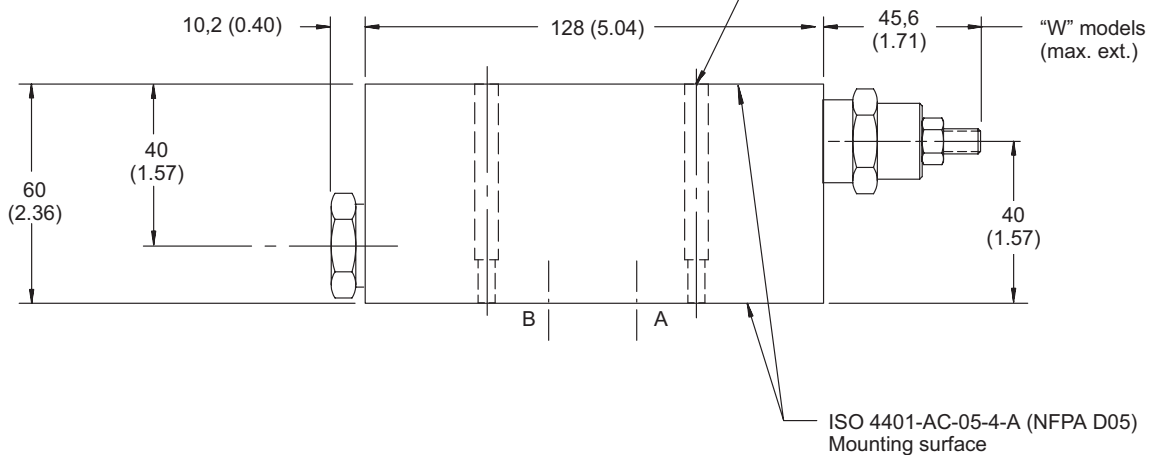

[Click here for optional adjustment devices.](#)

[Click here for interface dimensions.](#)

DGMX2 Pressure Reducing/Relieving Valves

General Description

These two-stage spool valves maintain a reduced outlet pressure against variations in inlet pressure.

These valves are able to act as relief valves (at 50% of maximum flow) to prevent excess pressure being developed when an actuator is subject to a reactive load. Relief flow is directed to the "T_B" port. *Therefore, for the relief function to operate, all components above this DGMX2 module must contain the "T_B" port, and the directional valve must have the "T_B" bypass feature.*

Pilot control may be from the "P", "A", or "B" port. Pilot drain flow may be directed

internally to tank port "T_A", or externally out of the valve body.

Any pressure in the line to which these valves are drained is additive to the valve pressure setting.

The valve pressure setting is adjustable by means of either an adjusting screw containing an internal hex, a hand-adjust knob, or a micrometer knob with keylock.

Different spring ratings cover an overall pressure range from 2 to 315 bar (30-4500 psi).


The metering spool element in this design is always positioned in the "P"

line (see symbols on page 14). The connection of the pilot control line determines at which port the reduced pressure is obtained. For example:

- "PP" pilot for reduced pressure in "P" port
- "PA" pilot for reduced pressure in "A" port
- "PB" pilot for reduced pressure in "B" port

The "A" and "B" line models provide for reduced pressure when "P" is connected to "A" or "B". It allows free flow through the service port when connected to "T" (all via a four-way directional valve).

Model Code

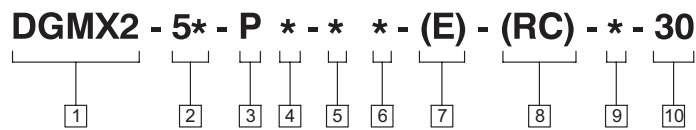

1 Valve function

Manifold or subplate mounted reducing/relieving valve.

2 Interface

5 - ISO 4401-AC-05-4-A, CETOP 5
 RP35A size 5 ANSI/NFPA D05
 5N - NFPA D05 (Alt. A)
 5P - NFPA D05 (Alt. B)

3 Port operated upon

P - Pressure port

4 Pilot control

A - Cylinder port A
 B - Cylinder port B
 P - Pressure port

5 Pressure range

A - 2,0 to 50 bar (30 to 725 psi)
 B - 8,5 to 100 bar (125 to 1450 psi)
 F - 8,5 to 200 bar (125 to 2900 psi)
 G - 8,5 to 315 bar (125 to 4500 psi)

6 Adjustment device

H - Knob adjuster
 K - Micrometer knob with keylock
 W - Screw with locknut

7 External drain

E - External drain
 Omit for internal drain models.

8 Remote control

Omit if not required.

9 Gage port & thread type

Gage port (all models),
 external drain (E)
 B - G 1/8" (1/8" BSPF)
 S - SAE-4 O-ring boss port
 (0.4375-20 UNF-2B thread)

10 Design number - 30 series

Subject to change. Installation dimensions unaltered for design numbers 30 to 39 inclusive.

DGMR1 Internal Pilot Operated Sequence Valves

General Description

These two-stage pressure operated valves are normally closed to flow through the main spool flow path. When system pressure reaches or exceeds the valve setting, the main spool flow path opens. Pilot flow may be externally or internally drained to tank.


Any pressure in the line to which these valves are drained is additive to the valve pressure setting.

The valve pressure setting is adjustable by means of either an adjustable screw

containing an internal hex, a hand-adjust knob, or a micrometer knob with keylock. Different spring ratings cover an overall pressure range from 5 to 315 bar (75-4500 psi).

Model Code

DGMR1 - 5* - P P - * * - (E) - * - 30



1 Valve function

Manifold or subplate mounted sequence valve.

2 Interface

5 - ISO 4401-AC-05-4-A, CETOP RP35H Size 5 ANSI/NFPA D05
 5N - NFPA-D05 (Alt A)
 5P - NFPA-D05 (Alt B)

3 Port operated upon

P - Pressure port

4 Pilot control

P - Pressure port

5 Pressure range

A - 5 to 50 bar (75 to 725 psi)
 B - 5 to 100 bar (75 to 1450 psi)
 F - 5 to 200 bar (75 to 2900 psi)
 G - 5 to 315 bar (75 to 4500 psi)

6 Adjustment device

H - Knob adjuster
 K - Micrometer knob with keylock
 W - Screw with locknut

7 External drain

E - External drain
 Omit for internal drain models.

8 Gage port & thread type


Gage port (all models), external drain (E) (optional).
 B - G 1/8" (1/8" BSPF)
 S - SAE-4 O-ring boss port (0.4375-20 UNF-2B thread)

9 Design number - 30 series


Subject to change. Installation dimensions unaltered for design numbers 30 to 39 inclusive.

Functional Symbols


DGMR1-5-PP-**-**-30




DGMR1-5-PP-**-E-**-30




DGMR1-5N-PP-**-**-30




DGMR1-5N-PP-**-E-**-30



DGMR1-5P-PP-**-**-30



DGMR1-5P-PP-**-E-**-30

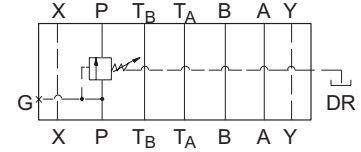

Operating Data


Basic Characteristics

Maximum flow:	120 l/min (32 USgpm)
Pilot flow @ 50° C (120° F) and 315 bar (4500 psi):	400-500 ml/min (24-31 in ³ /min)
Leakage flow rate @ 50° C (120° F) and 315 bar (4500 psi):	80-200 ml/min (5-12 in ³ /min)
Maximum operating pressure:	315 bar (4500 psi)
Operating temperature:	-0° to 80° C (32° to 180° F)
Weight:	3,5 kg (7.7 lbs.)

Insertion Losses


These curves show the typical pressure drop for each flow path in the valve. The "P" port pressure drop is the pressure drop for flow across the sequence valve spool in the fully open position.

The total insertion loss for the valve must be calculated by summing the losses through each of the four flow paths.

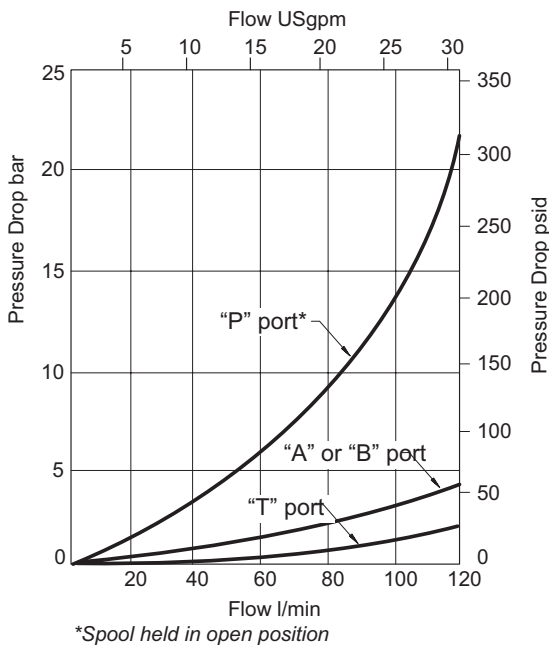

Pressure Override

Typical pressure override of the different pressure ranges at minimum and maximum settings.


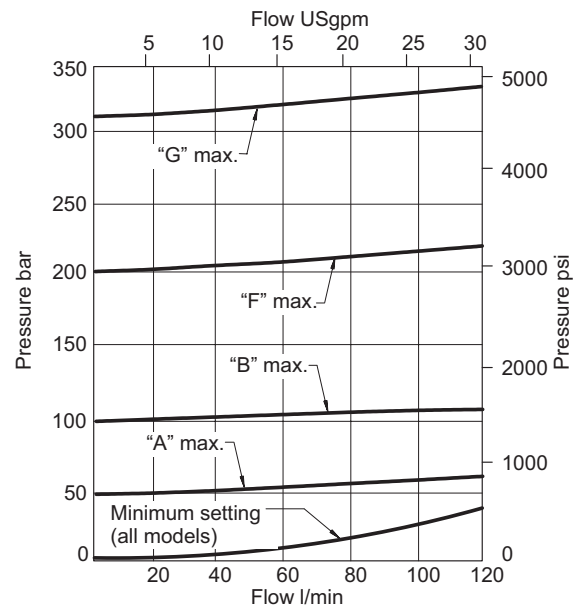


Installation Dimensions

DGMR1-5-PP-**-30 Sequence Valve

mm (inches)

See page 37 for optional adjustment devices.
See page 38 for interface dimensions.

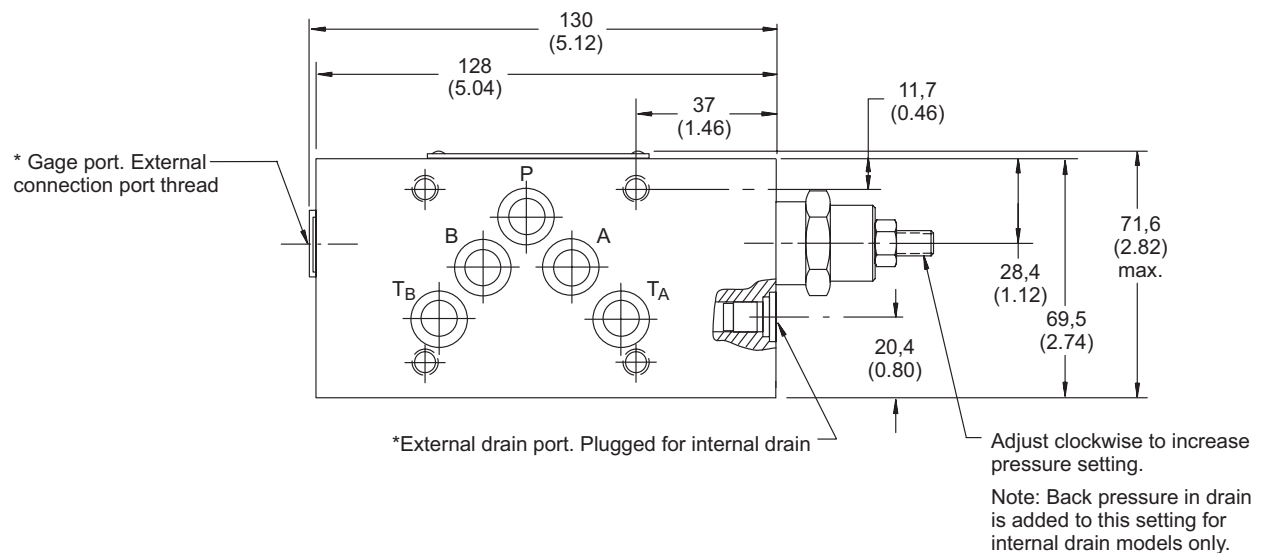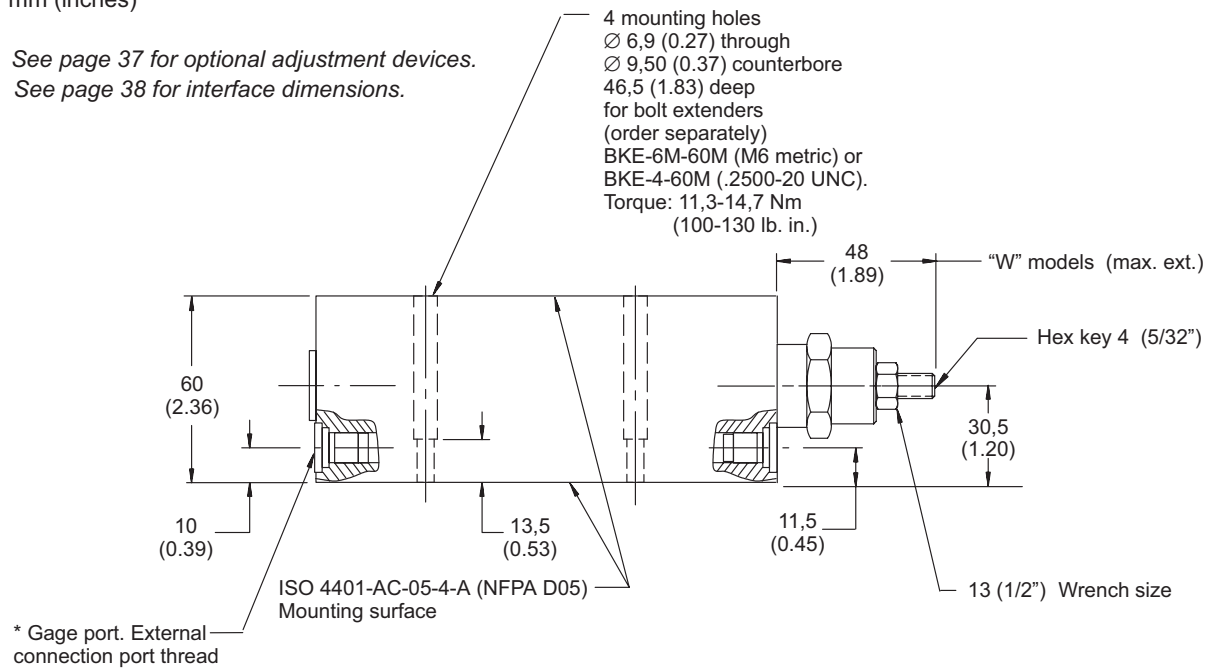

- *External drain and gage port threads
- "S" models - SAE-4 O-ring boss port (0.4375-20 UNF-2B thread).
- "B" models - G 1/8 (1/8 BSPF)

DGMR Counterbalance Valves

General Description

Vickers SystemStak counterbalance valves provide continuous protection from pump cavitation and prevent an actuator from running ahead of the pump supply. These valves also provide thermal relief protection in closed systems.

NOTE

Counterbalance valves adjust in the opposite direction of other pressure control valves. Turning the adjuster counterclockwise increases the valve setting. Turning the adjustment clockwise lowers the pressure setting, releasing the load.

Drain

Any pressure in the line to which these valves are drained is additive to the valve pressure setting.

Pilot pressure Calculation

To open the counterbalance valve by remote control (referring to functional symbols below):

For 4:1 ratio (typically for cylinder load control), nominal pilot pressure at Port B =


$$\frac{\text{Cracking pressure} + (5 \times \text{Port } A_1 \text{ pressure}) - \text{Port } A \text{ pressure}}{4}$$

For 10:1 ratio (typically for hydraulic motor control), nominal pilot pressure at Port B =


$$\frac{\text{Cracking pressure} + (11 \times \text{Port } A_1 \text{ pressure}) - \text{Port } A \text{ pressure}}{10}$$

Functional Symbols


DGMR-5-A*-FW-B*-FW-30

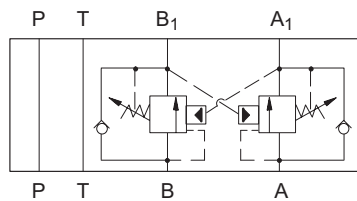


DGMR-5-A*-FW-30

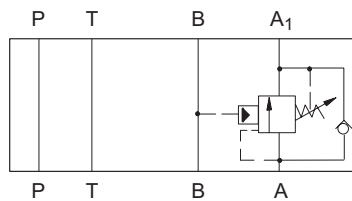

DGMR-5-B*-FW-30

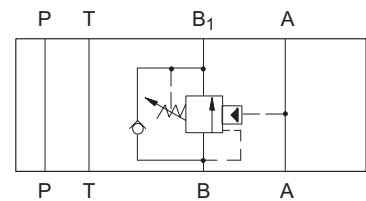

Model Code

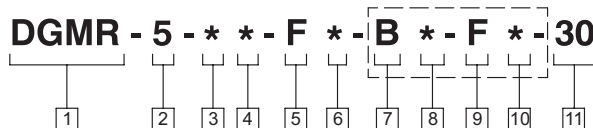

1 Valve function

Manifold or subplate mounted counterbalance valve.

2 Interface

5 - ISO 4401-AC-05-4-A, CETOP 5
RP35H, Size 5 ANSI/NFPA D05

3 Port operated upon

A - Counterbalance in A, piloted from B
B - Counterbalance in B, piloted from A

4 Pilot ratio

1 - 4:1
2 - 10:1

5 Pressure range

F - 60 to 210 bar (900 to 3000 psi)

6 Adjustment device

H - Knob adjuster
C - Cap over screw
W - Screw with locknut

7 Port acted upon

(Omit for single type.)
B - Counterbalance in B, piloted from A

8 Pilot ratio

(Omit for single type.)
1 - 4:1
2 - 10:1

9 Pressure range

(Omit for single type.)
F - 60 to 210 bar (900 to 3000 psi)

10 Adjustment device

(Omit for single type.)
H - Knob adjuster
C - Cap over screw
W - Screw with locknut

11 Design number - 30 series

Subject to change. Installation dimensions unaltered for design numbers 30 to 39 inclusive.



Installation Dimensions

DGMR-5-A*-FW-B*-FW-30 Dual Counterbalance on A & B Ports


mm (inches)



See page 37 for optional adjustment devices.
See page 38 for interface dimensions.

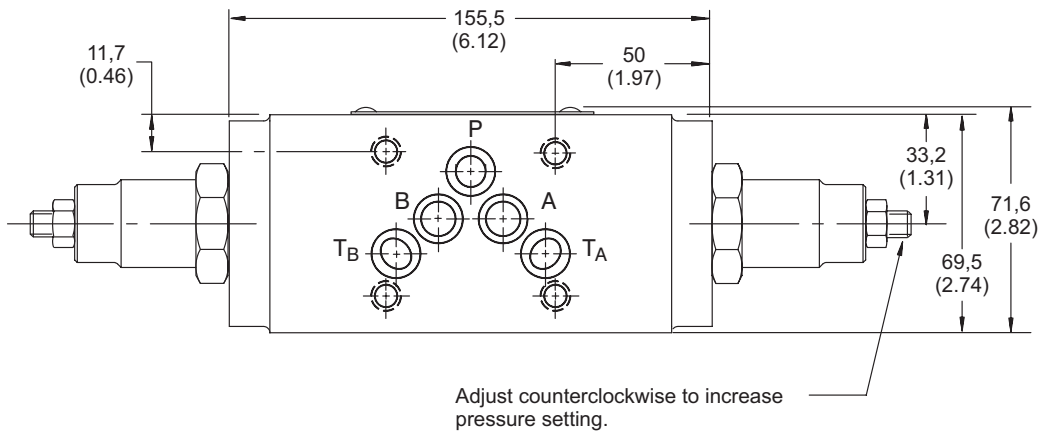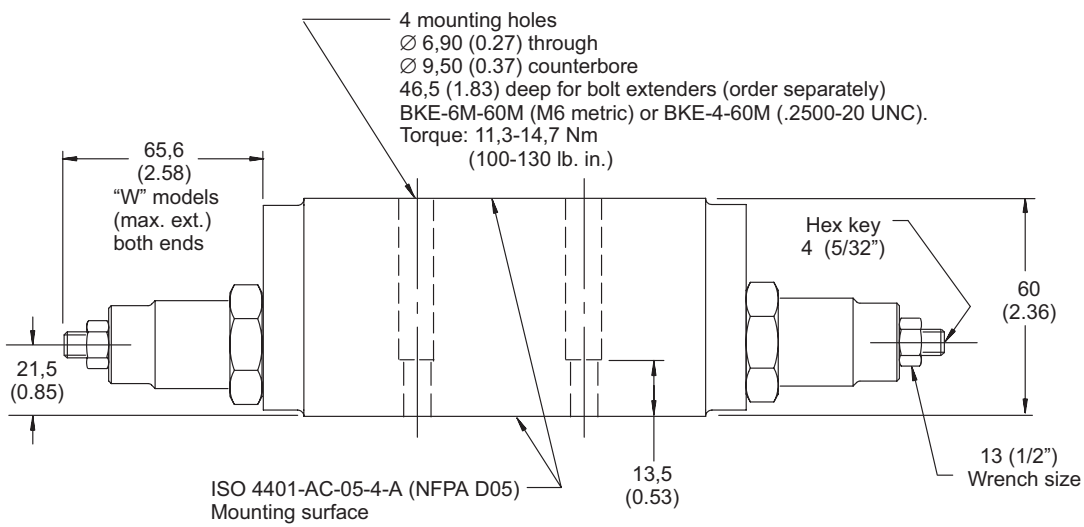


DGMR-5-A*-FW-30
Counterbalance Port A,
Piloted from B
 mm (inches)

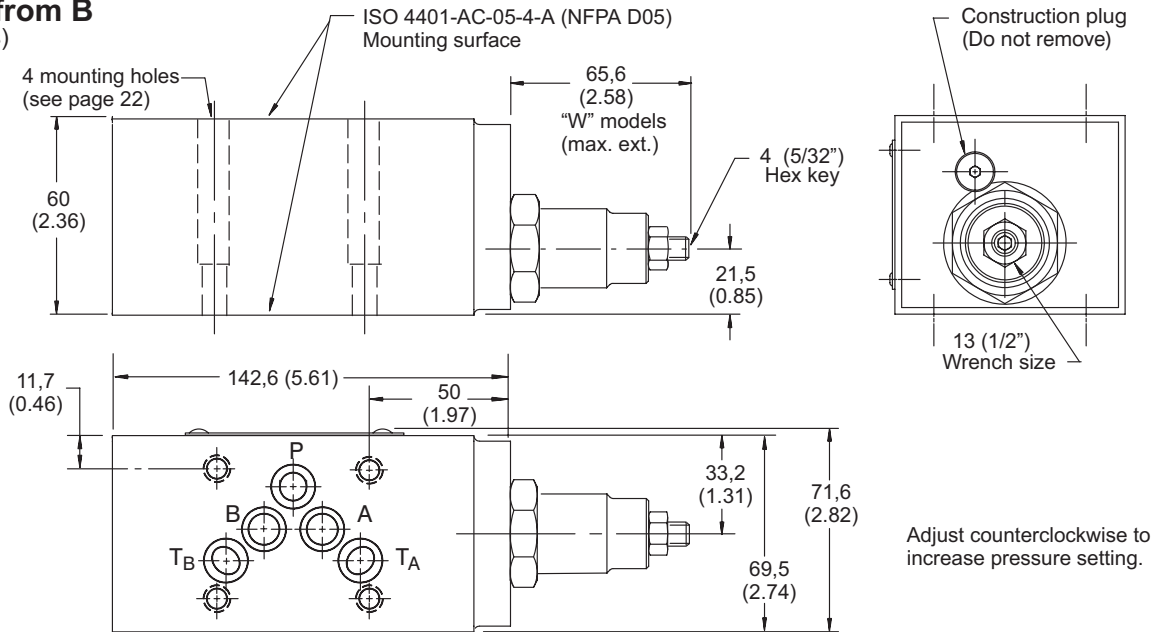

See page 37 for optional adjustment devices.
 See page 38 for interface dimensions.

DGMR-5-B*-FW-30
Counterbalance Port B,
Piloted from A

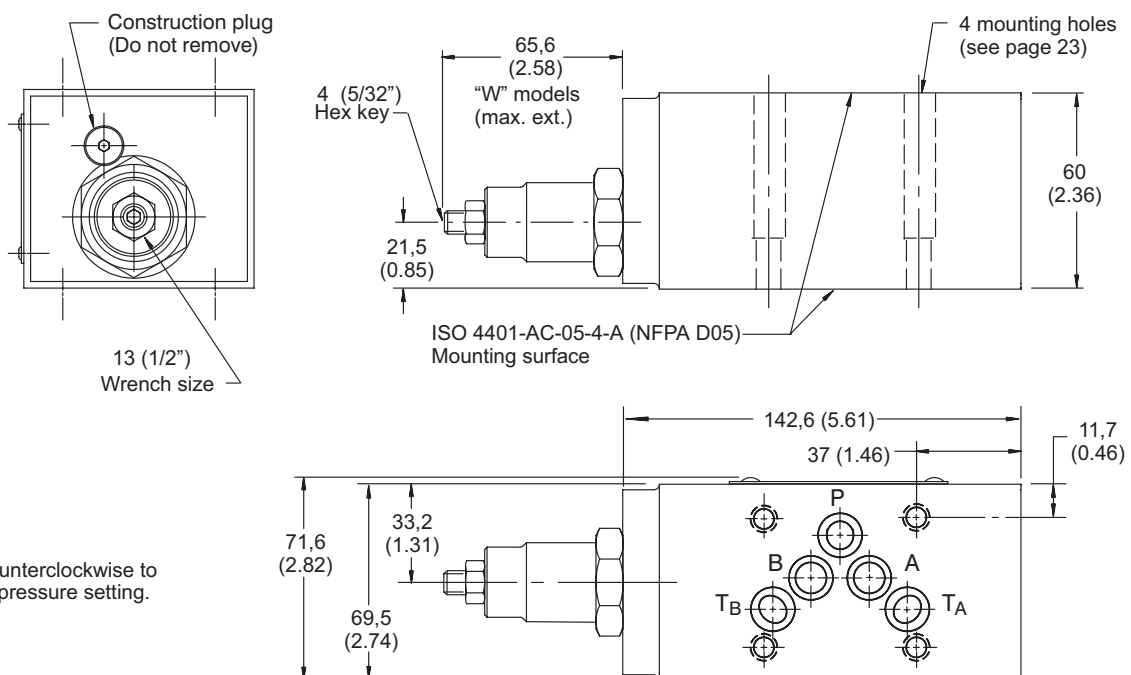

DGMFN Flow Control Valves

General Description

These valves are adjustable, non-compensated flow restrictors. An integral check valve around the regulating orifice allows free flow in one direction and metered flow in the other.

Control is available in "A" only, "B" only, and "A" and "B" ports as an "X" type

(meter-in) or "Y" type (meter-out).


The "P" port is available only in the "X" type (meter-in) and does not contain a reverse flow check.

The valve flow setting is adjustable by means of either a hex key adjusting screw and locknut, a hand-adjust knob,

or a micrometer knob with keylock.

A normal or fine metering capability is available. See the pressure drop curves on page 26 for detailed performance difference.

Model Code

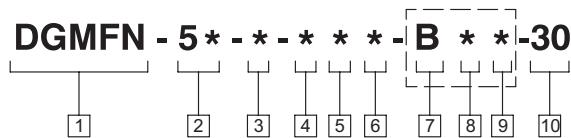

1 Valve function

Manifold or subplate mounted flow control valve.

2 Interface

5 - ISO 4401-AC-05-4-A, CETOP 5
Size 5 RP35H ANSI/NFPA D05
5N - NFPA D05 (Alt. A)
5P - NFPA D05 (Alt. B)

3 Direction of flow

X - Meter-in
Y - Meter-out

4 Port operated upon

A - Cylinder port "A" (single or dual type)
B - Cylinder port "B" (single type only)
P - Pressure port (single type only)

5 Adjustment range

1 - Fine control
2 - Normal control

6 Adjustment device

H - Knob adjuster
K - Micrometer knob with keylock
W - Screw with locknut

7 Port operated upon: second function

(Omit for single flow control models.)
B - B cylinder port (Dual type)

8 Adjustment range: second function

(Omit for single flow control models.)
1 - Fine control
2 - Normal control

9 Adjustment device: second function

(Omit for single flow control models.)
H - Knob adjuster
K - Micrometer knob with keylock
W - Screw with locknut

10 Design number - 30 series

Subject to change. Installation dimensions unaltered for design numbers 30 to 39 inclusive.

Installation Dimensions


DGMFN-5-X-P & DGMFN-5-Y-A Single Flow Controls

mm (inches)




4 mounting holes \varnothing 6,9 (0.27) through \varnothing 9,50 (0.37) counterbore 36,5 (1.44) deep for bolt extenders (order separately) BKE-6M-50M (M6 metric) or BKE-4-50M (.2500-20 UNC). Torque: 11,3-14,7 Nm (100-130 lb. in.)

Model	A	B
DGMFN-5-X-P	60,4 (2.38)	28,4 (1.12)
DGMFN-5-Y-A	52,7 (2.07)	33,2 (1.31)

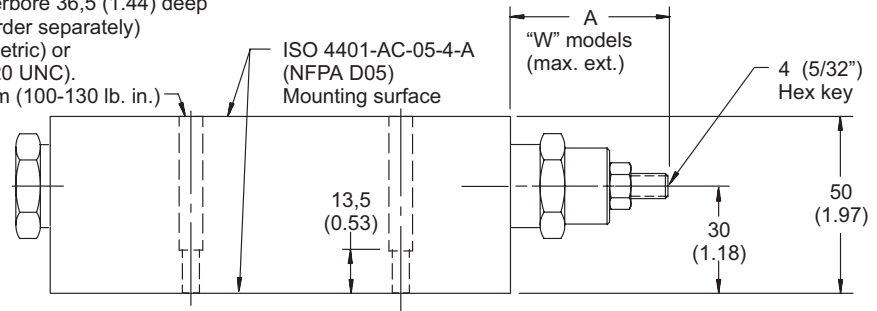

No hex plug on DGMFN-5-X-P models


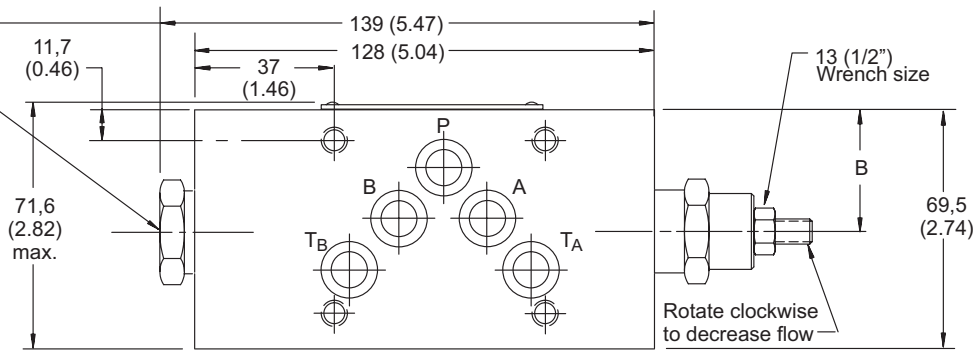


See page 37 for optional adjustment devices.


See page 38 for interface dimensions.

DGMFN-5-X-A Single Flow Control

mm (inches)

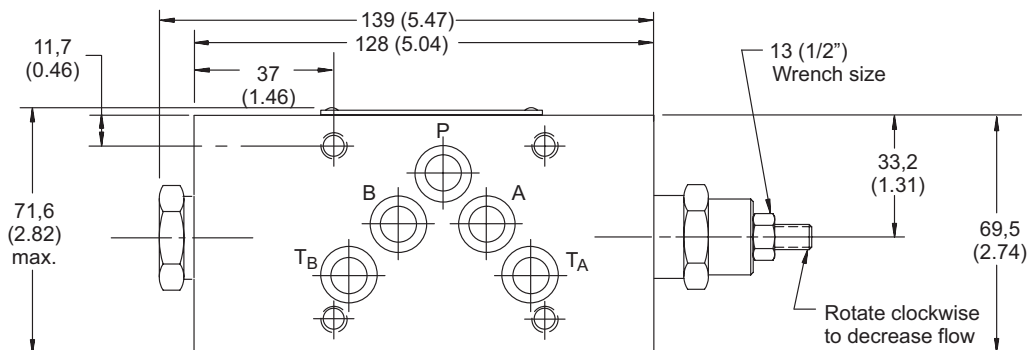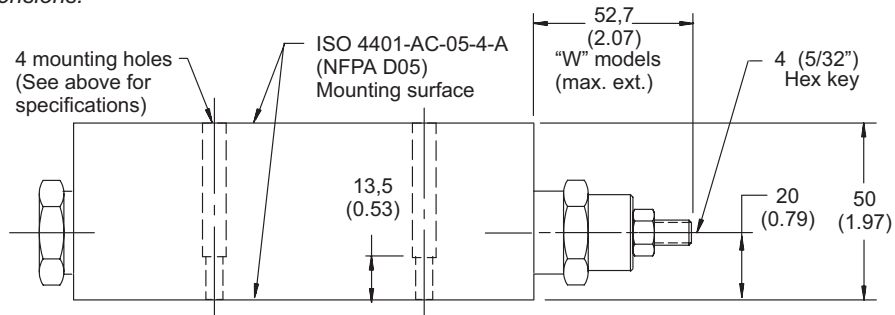


DGMFN-5-X-B
Single Flow Control
 mm (inches)

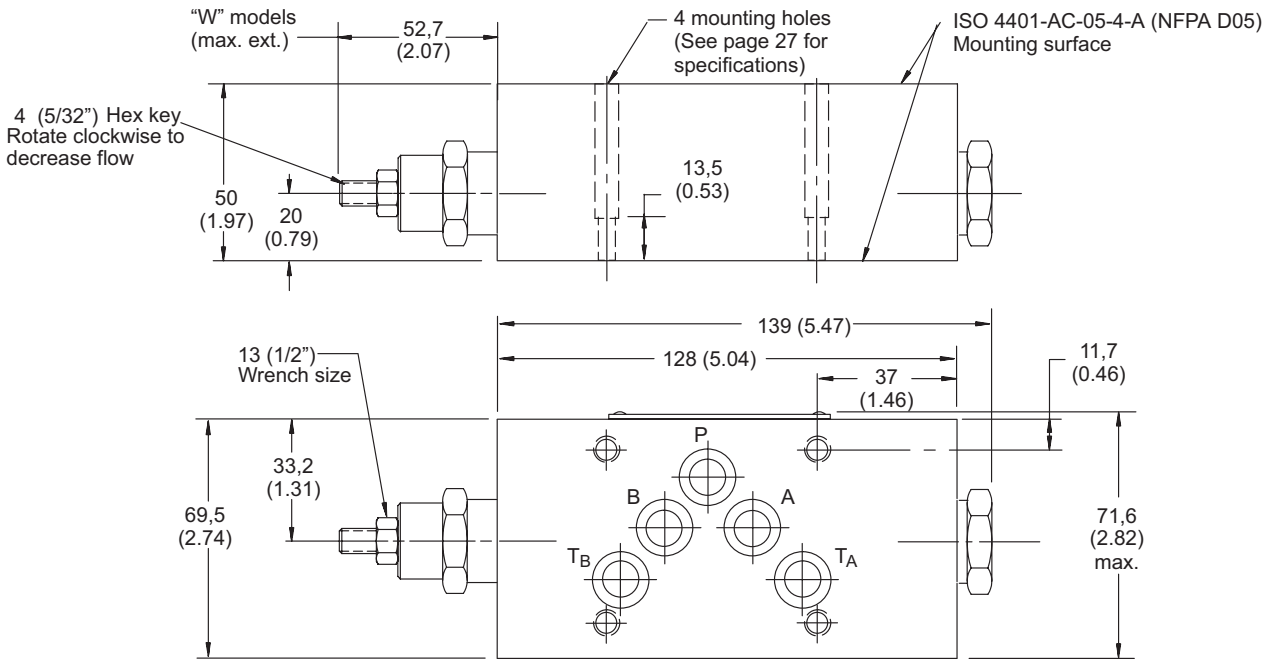


See page 37 for optional adjustment devices.
 See page 38 for interface dimensions.

DGMFN-5-Y-B
Single Flow Control

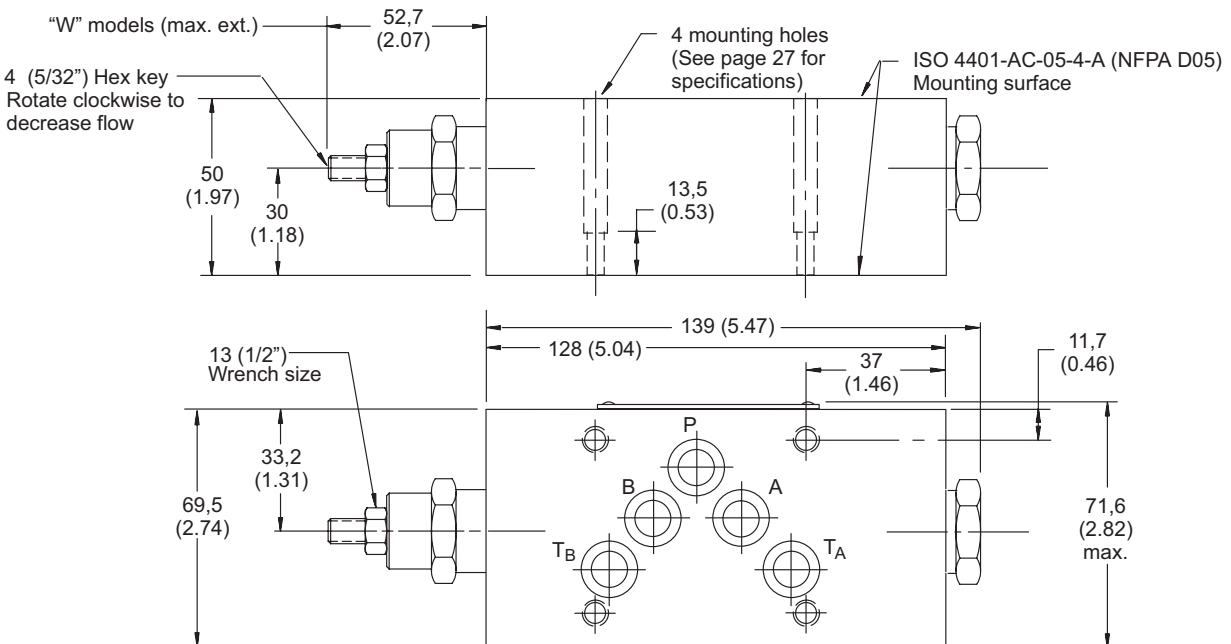

DGMFN-5-Y Dual Flow Control

mm (inches)

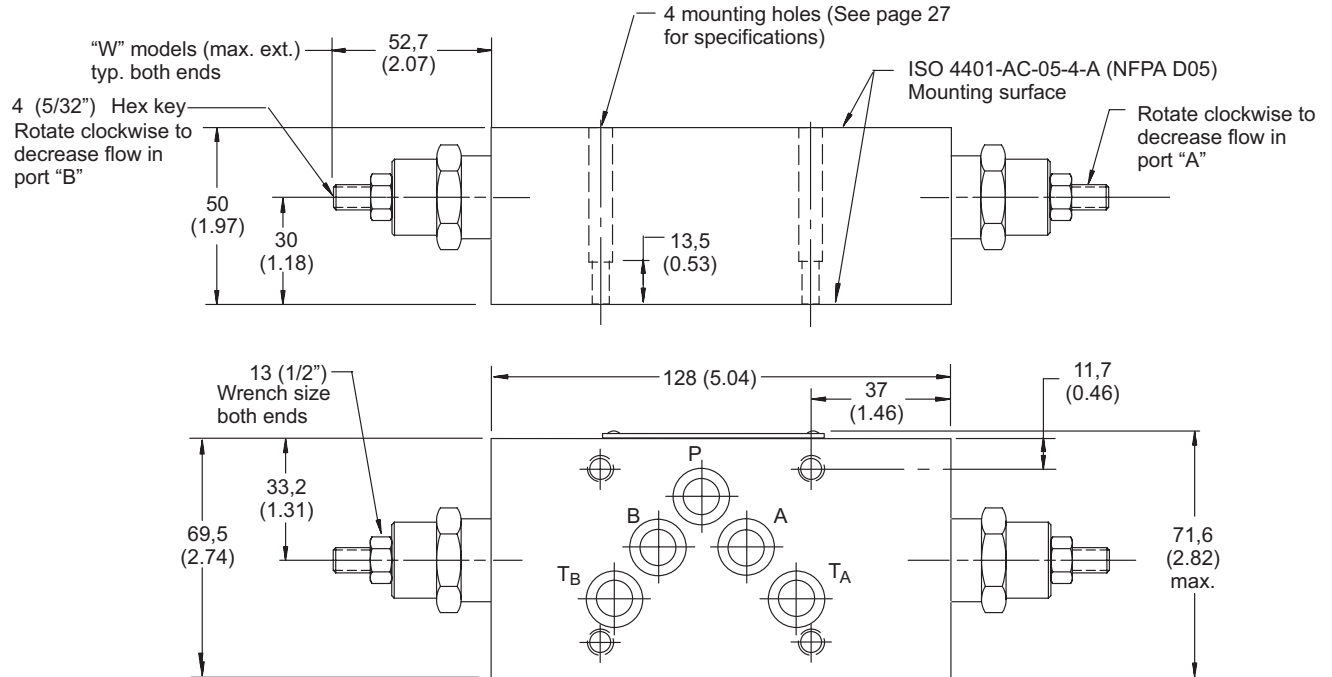


See page 37 for optional adjustment devices.

See page 38 for interface dimensions.

DGMFN-5-X Dual Flow Control

mm (inches)

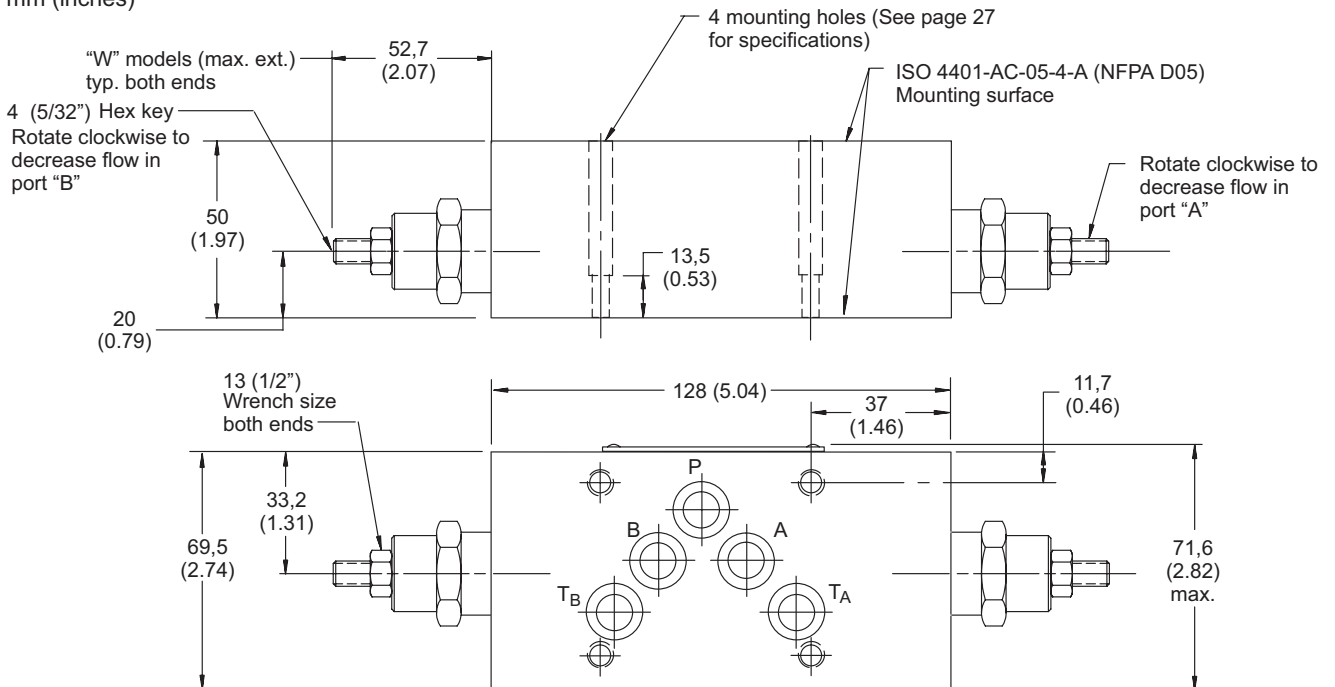

DGMPC Pilot Operated Check Valves

General Description

These valves are single or dual check units. Dual check units have identical check elements located in the "A" and "B" cylinder port lines. The check valve poppets are moved into the open position by a central pilot control spool which moves toward one check or the other, depending on which port is pressurized.

The check valve located in the return circuit is opened by the operating pressure in the primary circuit. When the pressure in the pilot line is vented, the check valve will remain closed.

The pilot spool area to valve seat ratio is 3:1 on standard models, and 20:1 on models with the decompression feature.

Check valve cracking (opening) pressures of 1 bar (15 psi), 2,5 bar (36 psi) and 5 bar (73 psi) are available. Please note that back pressure on the downstream or free-flow side of the pilot check valve may prevent the valve from opening in certain situations. (Back pressure opposes pilot pressure trying to open the valve.) In such cases, pilot pressure required to open the decompression poppet and valve can be calculated as follows:

To open valve or poppet in line A:

$$\text{Pressure at } B_1 = \frac{P_A + P_C - P_{A1}}{\text{Area ratio factor}} + P_{A1}$$

To open valve or poppet in line B:

$$\text{Pressure at } A_1 = \frac{P_B + P_C - P_{B1}}{\text{Area ratio factor}} + P_{B1}$$

Where:

- P_A = Pressure at A
- P_C = Cracking pressure
- P_{A1} = Pressure at A_1
- P_B = Pressure at B
- P_{B1} = Pressure at B_1


In the above cases, substitute cracking pressure and area ratio from the following:

Cracking pressure: 1, 2.5 or 5 bar according to model code position 6 (and position 10 for second function).

Area ratio factors:

Standard valve: 3
Decompression poppet: 20

Model Code

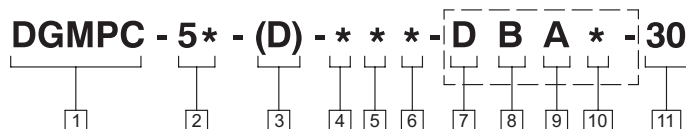

1 Valve function

Manifold or subplate mounted check valve.

2 Interface

5 - ISO 4401-AC-05-4-A, CETOP RP35H, Size 5 ANSI/NFPA D05
5N - NFPA D05 (Alt. A)
5P - NFPA D05 (Alt. B)

3 Decompression feature

D - With decompression feature
Blank - Standard (no decompression)

4 Check port

A - Check in cylinder port "A"
B - Check in cylinder port "B" (single check models only)

5 Pilot port

A - Pilot port controlling the "B" port check (single check models only)
B - Pilot port controlling the "A" port check

6 Cracking pressure

K - 1,0 bar (15 psi)
M - 2,5 bar (35 psi)
N - 5,0 bar (75 psi)

7 Decompression feature

D - Decompression feature
Blank - Standard (no decompression)
Omit for single check models.

8 Check port: second function

B - Check in cylinder port "B"
Omit for single check models.

9 Pilot port: second function

A - Pilot port controlling the "B" port check (dual check models only)
Omit for single check models.

10 Cracking pressure: second function

K - 1,0 bar (15 psi)
M - 2,5 bar (35 psi)
N - 5,0 bar (75 psi)
Omit for single check models.

11 Design number - 30 series

Subject to change. Installation dimensions unaltered for design numbers 30 to 39 inclusive.



Installation Dimensions

DGMPC-5-30 Pilot Operated Check Valve

mm (inches)

See page 38 for interface dimensions.

4 mounting holes
 \varnothing 6,9 (0.27) through
 \varnothing 9,50 (0.37) counterbore
 36,5 (1.44) deep
 for bolt extenders
 (order separately)
 BKE-6M-50M (M6 metric) or
 BKE-4-50M (.2500-20 UNC)
 Torque: 11,3-14,7 Nm
 (100-130 lb. in.)

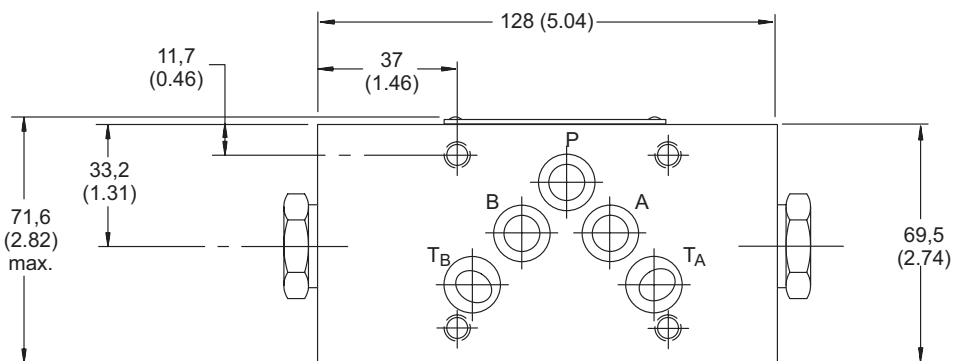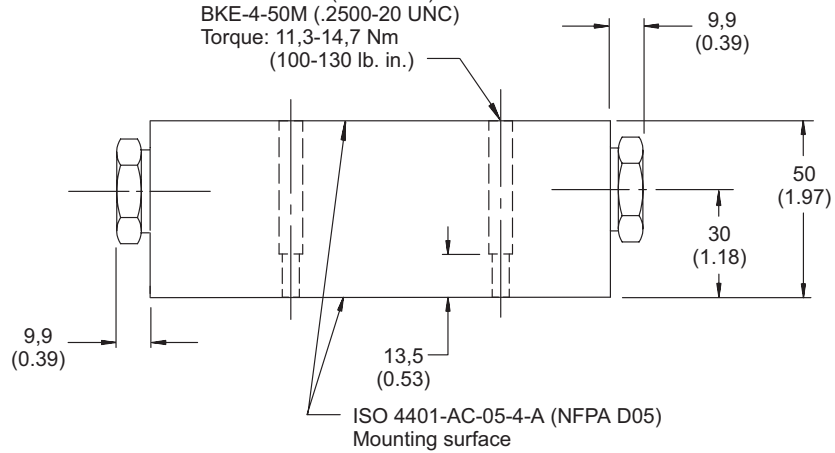

DGMDC Direct Check Valves

General Description

These SystemStak valves are self-operating, spring loaded, poppet type single or dual check units.

Location of the check element can be in the "A", "B", "P" or "T" port.


A check in the "P" port is available as a "Y" single check model only.

A check in the "T" port is available as an "X" single check model only.

The dual check unit has identical check elements in both the "A" and "B" ports.

Check valve cracking (opening) pressures of 1 bar (15 psi), 2,5 bar (35 psi) and 5 bar (75 psi) are available.

Model Code

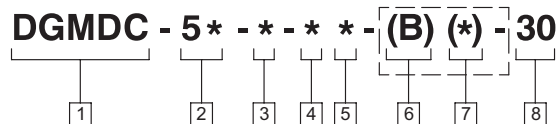

1 Valve function

Manifold or subplate mounted check valve.

2 Interface

5 - ISO 4401-AC-05-4-A, CETOP RP35H, Size 5 ANSI/NFPA D05
 5N - NFPA D05 (Alt. A)
 5P - NFPA D05 (Alt. B)

3 Direction of flow

X - Free flow from actuator (load)
 Y - Free flow to actuator (load)

4 Check location

A - Check in cylinder port "A" ("Y" models only)
 B - Check in cylinder port "B" ("Y" models only)
 P - Check in pressure port "P" ("Y" models only)
 T - Check in tank port "TA" ("X" models only)

5 Cracking pressure

K - 1,0 bar (15 psi)
 M - 2,5 bar (35 psi)
 N - 5,0 bar (75 psi)

6 Check location: second function

Omit for single check models.
 B - Check in cylinder port "B" (dual check models only)

7 Cracking pressure: second function

Omit for single check models.

K - 1,0 bar (15 psi)
 M - 2,5 bar (35 psi)
 N - 5,0 bar (75 psi)

8 Design number - 30 series

Subject to change. Installation dimensions unaltered for design numbers 30 to 39 inclusive.